


— OR —

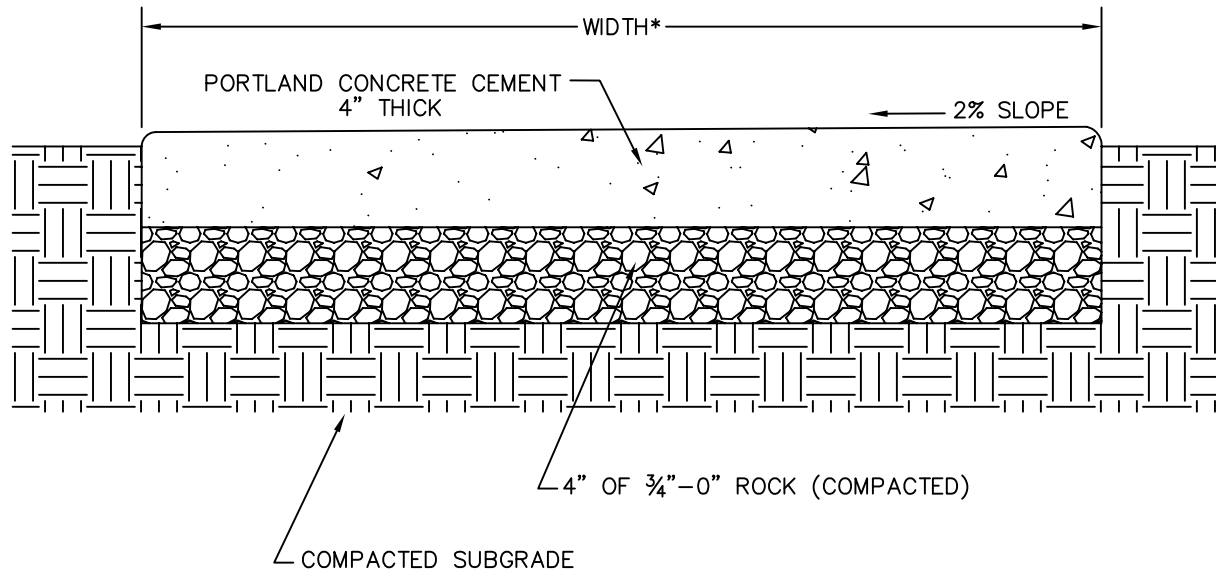

NOTES:

1. CONCRETE SHALL BE 3300 PSI AT 28 DAYS. HMA LVL 2, $\frac{1}{2}$ " DENSE MIX SHALL MEET ODOT SPEC.
2. CONCRETE PATH PANELS SHALL BE SQUARE, HAVE $\frac{3}{4}$ " DEEP SCRIBES AT JOINTS, 3" EDGE SHINE ON 4 SIDES AND HAVE A LIGHT BROOM BRUSH FINISH.
3. PEDESTRIAN PATH OR BIKEWAY SHALL HAVE A MINIMUM WIDTH OF 7 FEET. *

*SEE FIGURE 8-6 OF THE TSP FOR TRAIL WIDTH STANDARDS



STANDARD DRAWING TITLE

PEDESTRIAN PATH & BIKEWAY SECTIONS
(NOT ADJACENT TO ROADWAY)

DRAWING NUMBER

RD-63

Any alteration of this drawing may not be
associated in any way with the City of
Sherwood Standard Drawings.

SCALE

N.T.S.

DATE

MAR '16