


LETTER HEIGHTS ON TELES PAR MOUNTED STREET NAME SIGNS (REFER TO MUTCD TABLE 2D-6)

Street & Highway Type	Speed Limit	Sign Height (in.)	Recommended Minimum Letter Height (in.)			
			Initial Uppercase	Lowercase	Prefix/Suffix Uppercase	Prefix/Suffix Lowercase
Local	25 MPH	A	B	C	D	E
		8"	4"	3"	3"	2.25"
Multi - Lane	30 MPH to 40 MPH	12"	6"	4.5"	4"	3"
Multi - Lane	More than 40 MPH	SEE MUTCD	SEE MUTCD	SEE MUTCD	SEE MUTCD	SEE MUTCD

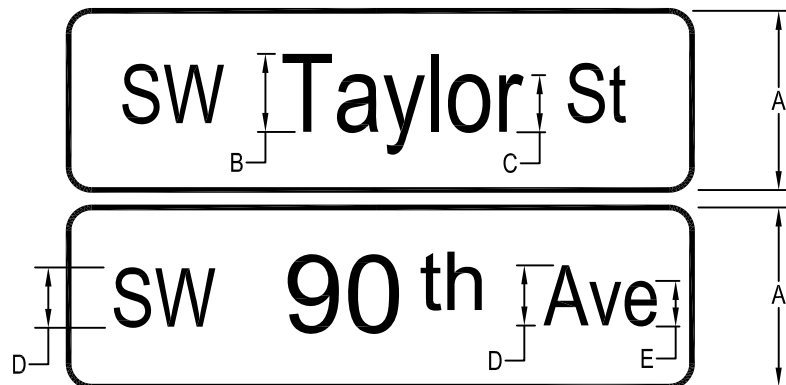

CITY TELES PAR MOUNTED STREET SIGNS

Street Name Signs:

1. Verify final street names with the City before ordering street name signs. Sign materials, dimensions, text and specifications submittal shall be provided to the City for review prior to ordering.
2. Lettering for names of streets shall be composed of a combination of lower-case letters with initial upper-case letters.
3. Street name signs for intersecting streets shall be designed to the standard for the approaching road.
4. Spacing between words or between words and sign edges should be approximately 3/4 of the upper case letter height.
5. Green ASTM type 3 or 4 background with silver-white ASTM type 3 or 4 legend.
6. Sheet aluminum shall be used for all street name signs.
7. Border shall be 5/8" width with zero margin and 2" radius sign corners.
8. Install telespar mounted signs per detail RD-35.
9. All street name sign text, excluding superscript (top justified), shall be center justified type C font. Common abbreviations : use MUTCD table 1D-1, with these exceptions:
Avenue=Ave; Lp=Loop; Way=Way
10. All street signs shall comply with MUTCD standards, latest edition.



STANDARD DRAWING TITLE

DRAWING NUMBER

SIGN TEXT DETAIL

S-2

Any alteration of this drawing may not be associated in any way with the City of Sherwood Standard Drawings.

SCALE

REVISION DATE

N.T.S.

2024.10.29