




PLAN VIEW

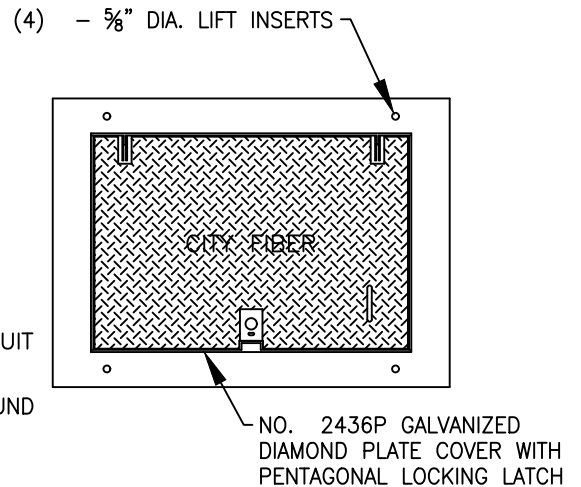

TOP PLAN

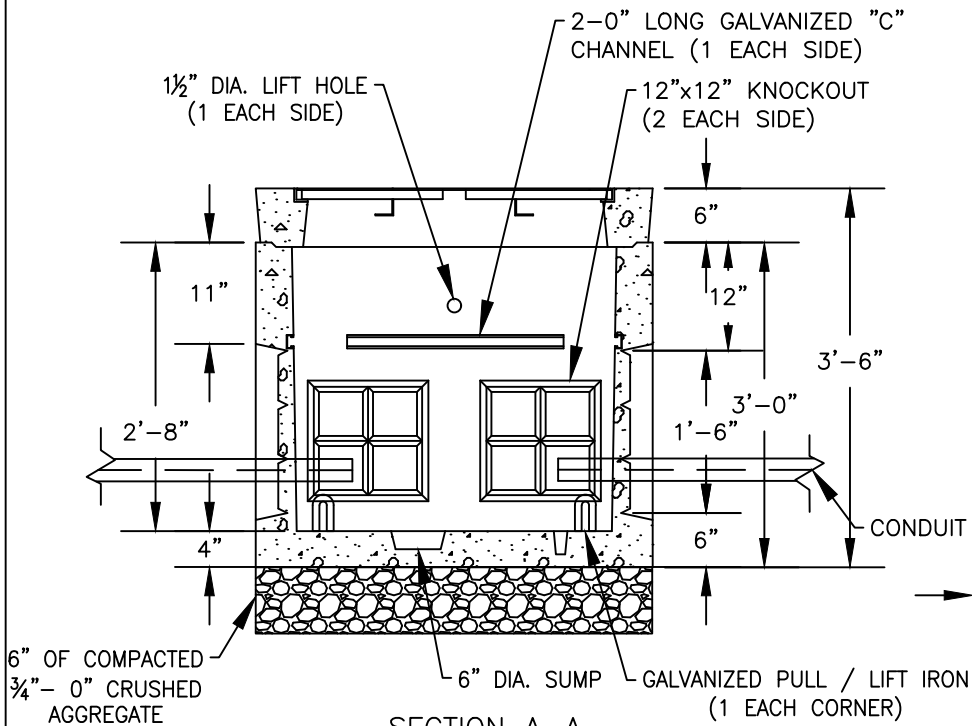

SECTION A-A

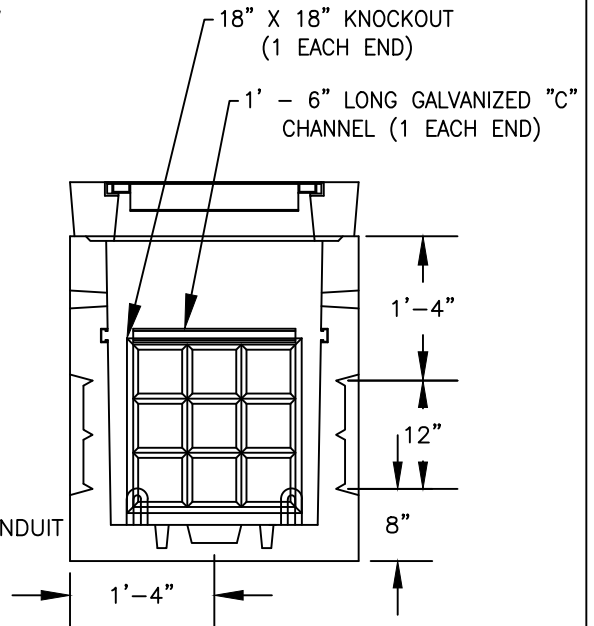

END VIEW

**NOTES:**

1. FIBER SPLICE VAULT SHALL BE OLDCASTLE PRECAST UTILITY VAULT #233-LA (UNLESS OTHERWISE APPROVED OR SPECIFIED).
2. SEE STANDARD SPECIFICATIONS FOR CONDUIT DEPTH, SIZE AND TYPE. 2-2" ORANGE HDPE TYPICAL.
3. MULE TAPE AND #10 AWG TRACER WIRE TO BE INSTALLED BY CONTRACTOR. MULE TAPE AND TRACER WIRE TO BE WRAPPED AND DUCT TAPED TO SIDE WALL OF VAULT.
4. SPLICE VAULT TO BE INSTALLED ON 6" MIN. LAYER OF COMPACTED 3/4" - 0 CRUSHED ROCK.
5. GROUT CONDUIT ACCESS HOLES WITH NON-SHRINK GROUT.



STANDARD DRAWING TITLE

CITY FIBER SPLICER VAULT

DRAWING NUMBER

FO-5

Any alteration of this drawing may not be associated in any way with the City of Sherwood Standard Drawings.

SCALE  
N.T.S.

DATE  
MAY '18